

# Bonnell Spring




## Bonnell Spring

Doraçelik Bonnell springs deliver a combination of durability and balanced comfort for mattress and seating system production. Supported by a strong manufacturing infrastructure, they adapt quickly to varying requirements and provide long-lasting, reliable performance.



Spring Diameter  
68 mm-96 mm



Spring Height  
90 mm-180 mm



Number of Turn  
4-5-6




Wire Diameter  
1,90 mm-2,50 mm



Pallet  
500 kg -750kg



Bales ≈ 25 kg

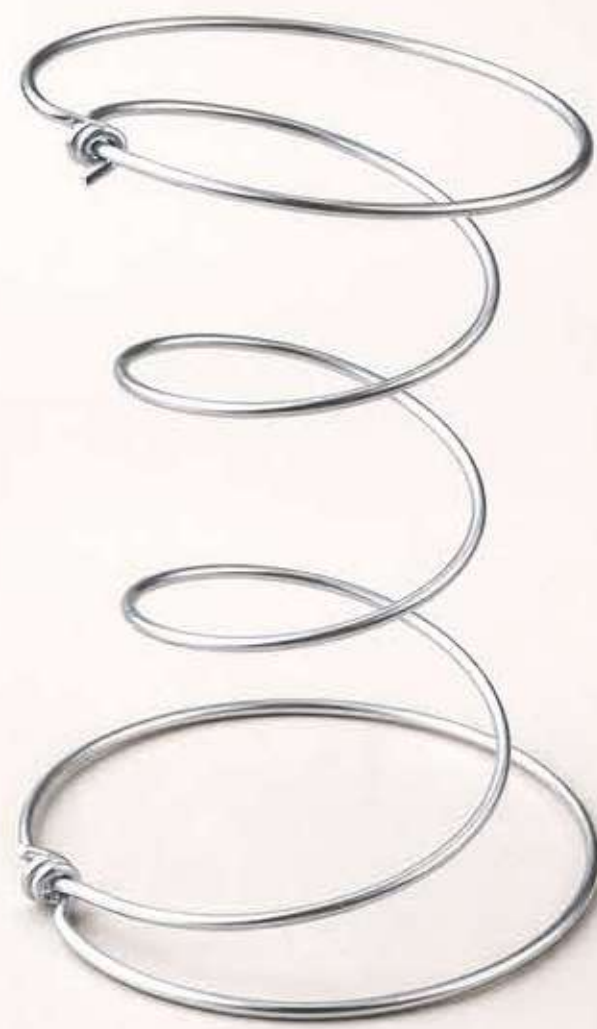

## Bonnell Spring

Bonnell Spring Specifications	Production Range
Quality Standard	TS-7167
Bonnell Spring Head Diameter Ø	72- 96 mm
Bonnell Spring Height (mm)	90 -180 mm
Bonnell Spring Wire Diameter Ø	1,90 - 2,50 mm
Bonnell Spring Coil Count	4,5 and 6 Spin
Packaging Information	≈ 25 kg bales
Packaging Information	500 and 1000 kg
Pallet Dimensions	tandard 100×100 Palletized Custom Palletization Available