

MULTIPLY



MULTIPLY

Next-Generation Comfort in Layered

Developed through the precise engineering integration of multiple spring layers, MULTIPLEX dynamically delivers the support the body requires, elevating comfort to the next level. Its layered structure distributes pressure evenly, providing optimal support to the spine.

By expanding the range of support and flexibility, this system offers long-lasting performance with its double-sided usability. The spring layers can be reconfigured according to customer preferences, allowing the total height and comfort level to be adjusted as desired, ensuring seam-

tations.



Spring Diameter
37-81 mm



Spring Height
100-250 mm



Number of Turns
4-10



Wire Diameter
1,20 mm-2,30 mm




Number of Springs per m²
320-1700 Adet



Zoned



Top & Bottom
Fabric Bonding



Hog Ring
Connected




Roll Packing
1-10 adet



MULTIPLY Pocket Spring Unit Production

Quality Standard	TS-7167
Pocket Spring Diameter Ø	37-81 mm
Pocket Unit Height	100-250 mm (height increases in open configurations)
Pocket Unit Wire Diameter Ø	1,20 mm-2,30 mm
Number of Springs per m ²	320-1700 pcs
Pocket Unit Spin Count	4-10 Spin
Pocket Unit Frame Specifications	• Standard 10 × 1,4 mm lamet frame • Circular frame can be produced in the desired diameter • Zoned frame configuration available • Frameless production option available
Pocket Unit Packaging	Roll-packed with paper wrapping or compressed
Maximum Unit Width	Up to 200 cm
Unit Length	Can be produced in the desired length
Arrangement	Flat and nested arrangements can be applied separately or simultaneously
Production Type	Units can be produced width-to-width or width-to-length
Zone Type	Can be produced with the desired number and sequence of zones
Bonding Type	Center bonding, top & bottom fabric bonding, or both

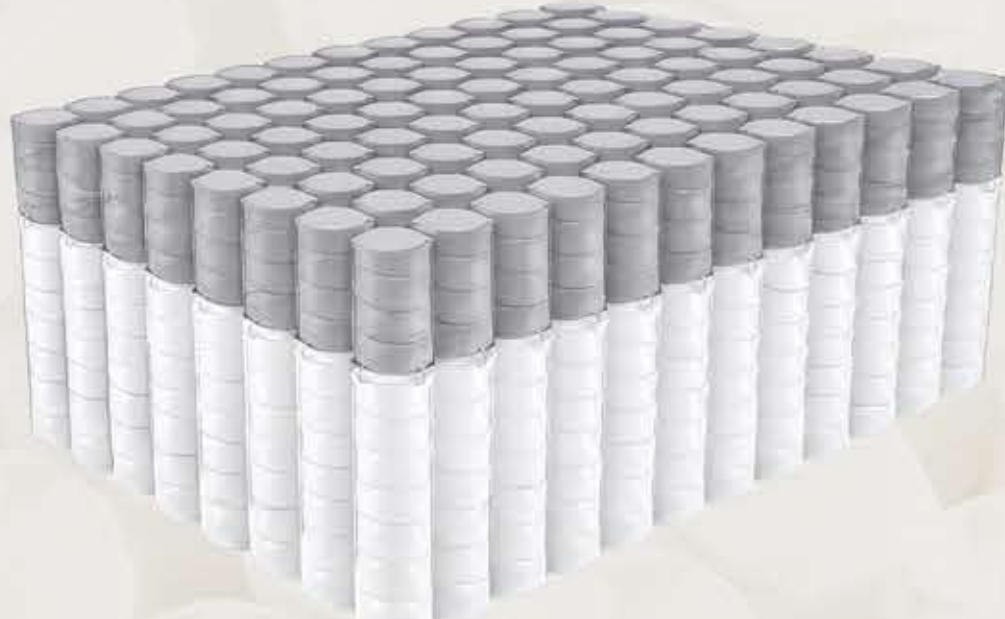

With MULTIPLEX, multiple spring layers work together to provide precisely the level of support the body needs.